

# INSECT-O-CUTOR®

FLYING INSECT ELECTROCUTORS

## ENERGY-EFFICIENT THREE-LAMP SERIES 894E

UNITED STATES MODEL NUMBER	CANADIAN MODEL NUMBER	MODEL SERIES	BLACK LIGHT ATTRACTION LAMPS	METAL MATERIALS
894EDGA	894EDGA	8	TWO 36 AND ONE 36B	ALUMINIZED STEEL
894EDGS	894EDGS	8	TWO 36 AND ONE 36B	STAINLESS STEEL

Series 894E models are designed to comply with various energy compliance acts and energy conservation programs. Using electronic ballasts and T8 diameter lamps, these models reduce average electrical consumption by 26% to 40% (compared to standard magnetic ballasted T12 lamp systems). Additionally, overall light output is increased 8% to 15% per lamp due to increased operational efficiency. Less energy consumed ... more insect attraction light emitted.

### HANG, WALL MOUNT, FREE-STAND


Series 894E Models may be ceiling hung/suspended or horizontally wall mounted ... or simply set on counters/worktables. Typical installation locations include loading docks, warehouses, and near firewall breaks.

**STANDARD FEATURES:** Equipped with three 36" T8 black light insect attraction lamps. Top, front, and rear safety guards provide for multi-directional black light emission; stainless steel flange securely holds the guard open during maintenance. Jacknuts (threaded holes) on unit's top accommodate eyebolts for hanging. Removable rear reflector should be used when the unit is wall mounted or removed when the unit is ceiling-hung. Non-scratch footpegs protect flat surfaces when unit is free-standing. Safety switch interrupts electrical current when servicing unit; internal metal insect collection drawer; spring-loaded and fixed lampholder sets for simple lamp installation; three-wire grounded cord and plug. Heavy-duty transformer is shunt-protected. Safety-tested and certified by Intertek Testing Services, N.A. Inc. (ETL™) and Canadian Standards Association (CSA®).

**ENERGY EFFICIENT (EE) MODELS** are designed to comply with various energy compliance acts and energy conservation programs. Electronic-ballasted models reduce overall electrical consumption, while increasing light output by 8% to 15% per lamp due to increased operational efficiency. Less energy consumed... more insect attraction light emitted.

### TECHNICAL DATA AND ELECTRICAL SPECIFICATIONS 120 VOLT/60 HZ MODELS ONLY

<b>PRIMARY: 120 VOLTS, 60 HERTZ</b>	<b>SECONDARY: 4500 VOLTS</b>	NOTE: UNIT MUST BE GROUNDED.
TRANSFORMER (WITH INTERNAL CAPACITANCE):		T740C
mA OUTPUT: 9.8 AMP. INPUT: 0.7		
ENERGY EFFICIENT BALLAST — ONE PER UNIT:		BPE36
<b>UNIT DIMENSIONS:</b>	42.00" / 106.70 CM WIDE X 16.25" / 41.30 CM HIGH X 6.50" / 16.51 CM DEEP	
<b>SHIPPING WEIGHTS:</b>		
ALUMINIZED STEEL:	43 LBS / 19.5 KG	
STAINLESS STEEL:	45 LBS / 21.3 KG	
<b>UNIT DIMENSIONS:</b>	16.25" / 41.30 CM WIDE X 60.00" / 152.40 CM HIGH X 7.25" / 18.50 CM DEEP	
<b>PACKED CARTON:</b>	3.96 CUBIC FEET / 0.112 CUBIC METERS	

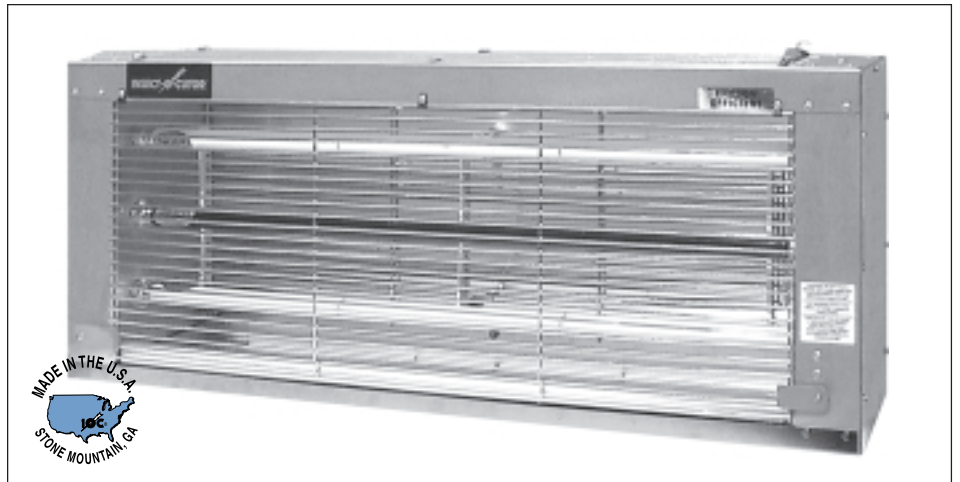

Contains Mercury; Dispose According to Local, State or Federal Laws

1641 Lewis Way  
Stone Mountain, GA, USA 30083-1107  
Phone: (770) 939-2835  
Fax: (770) 621-0100  
e-mail: info@insect-o-cutor.com

<http://www.insect-o-cutor.com>