



**Glueboard Fly Light
Installation and Maintenance
Manual**

Model GBWS252

CAUTION

- Do not immerse this unit in water.
- Do not abuse power cord.
- If doubt arises regarding safety or installation, contact your local dealer or Insect-O-Cutor® directly.



SAFETY-TESTED
AND CERTIFIED
BY INTERTEK
TESTING SERVICES
NA INC.

GENERAL

Model GBWS252 is a non-electrocuting, glueboard insect light trap that can be mounted on the wall in horizontal or vertical positions. Once installed, the unit should be turned off for maintenance and cleaning.

PRINCIPAL OF OPERATION

Virtually all flying insects (flies, moths) are responsive or attracted to ultraviolet energy. Guardian® Model GBWS252 uses two ultraviolet insect attraction lamps to lure insects. Once lured to the unit, the insect is trapped upon a sticky glueboard for later inspection and disposal.

AREAS OF USE

Ideally suited for food service operations (retail food outlets, kitchens, grocers), the GBWS252 is used anywhere flying insects pose a hygiene hazard. **Unit is for Indoor Use Only.**

WARRANTY

This product is warranted for a period of twelve months from the date of sale against defective parts and workmanship excluding black light lamps and sticky glueboards. Proof of purchase required.

SELECTING AN INSTALLATION LOCATION

To obtain the most effectiveness from the Model GBWS252, it is important to install the unit in a correct position. When and where possible, the unit should be set 90° from a large window or active doorway. Avoid installing the unit too high; recommended height from the floor is 6 to 7 feet. Avoid setting the unit where air currents could blow insects away from the unit.

Install the unit so that its light emission is not obstructed. If an insect cannot see the unit, then it will not be fully effective.

The unit should not be installed immediately above or beside open food and preparation areas. The intention of the unit is to lure insects away from such areas.

Warning: To avoid prolonged exposure to ultraviolet light, the unit should be placed 4 to 8 feet away from any personnel workstation.

INSTALLATION

- Please thoroughly read these installation instructions before proceeding.
- Before installing, ensure that all packing materials have been removed from the unit.


The unit is supplied with mounting hardware, drywall anchors and screws for affixing the unit to the wall. The unit is equipped with a three-prong, grounded electrical plug and 6 ft. cord.

- This fixture must be grounded.
- This fixture must be securely installed before electricity is connected.
- If installation of Model GBWS252 is made in the vertical position, the power cord must be at the bottom of the unit.

RECOMMENDED ROUTINE MAINTENANCE

Always disconnect the electrical supply before servicing.

- Inspect weekly; clean metal surfaces with damp cloth.
- Replace glueboards monthly or earlier as needed.
- Replace attraction lamps at least annually.
- When disposing of this unit's lamps, consult local, state and federal waste management and environmental protection laws regarding the handling of mercury which is present and is vital to the operation of fluorescent lamps.

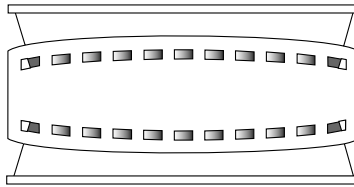

PARTS

- 1 - Decorative Face Plate
- 1 - Backplate
- 1 - Electrical Box
- 1 - Power Cord and Plug
- 2 - Insect Attraction Lamps No. 25
- 4 - Lampholders; 2 LV487 (Right) and 2 LV486 (Left)
- 3 - Drywall Anchor/Screw Sets
- 1 - Energy-Efficient Ballast Part No. BPE18
- 4 - Sticky Glueboards — 4-7/8" X 22" — Part No. GB5 BLK



1641 Lewis Way
Stone Mountain, GA, USA 30083-1107
Phone: (770) 939-2835
Fax: (770) 621-0100
Email: info@insect-o-cutor.com
<http://www.insect-o-cutor.com>