


VERTICAL WALL MOUNT SERIES 11

UNITED STATES		CANADIAN	MODEL	BLACK LIGHT	METAL
HP MODELS	EE MODELS	MODEL NUMBER	SERIES	ATTRACTION LAMPS	MATERIALS
1192DG	1199EDG	N/A	11	48 AND 48B	SAND BEIGE TEXTURED
1192DGA	1199EDGA	N/A	11	48 AND 48B	ALUMINIZED STEEL
1192DGS	1199EDGS	N/A	11	48 AND 48B	STAINLESS STEEL

TECHNICAL DATA AND ELECTRICAL SPECIFICATIONS

120 VOLT/60 HZ MODELS	220 VOLT/50 HZ MODELS
<p>PRIMARY: 120 VOLTS, 60 HERTZ SECONDARY: 4500 VOLTS NOTE: UNIT MUST BE GROUNDED.</p> <p>TRANSFORMER (WITH INTERNAL CAPACITANCE): T740C mA OUTPUT: 9.8 AMP. INPUT— HP MODELS: 1.8-2.0 EE MODELS: 1.4-1.5</p> <p>HIGH PERFORMANCE BALLASTS — ONE OF EACH PER LAMP: PRIMARY: BP48 AUXILIARY: BA48</p> <p>ENERGY EFFICIENT BALLASTS — ONE PER UNIT: BPE24/48-2</p> <p>SHIPPING WEIGHTS:</p> <p>BEIGE TEXTURED: 68 LBS / 31.0 KG ALUMINIZED STEEL: 68 LBS / 31.0 KG STAINLESS STEEL: 73 LBS / 33.0 KG</p> <p>UNIT DIMENSIONS: 16.25" / 41.30 CM WIDE X 60.00" / 152.40 CM HIGH X 7.25" / 18.50 CM DEEP</p> <p>PACKED CARTON: 6.6 CUBIC FEET / 0.18 CUBIC METERS</p>	<p>PRIMARY: 220 VOLTS, 50 HERTZ SECONDARY: 5000 VOLTS NOTE: UNIT MUST BE GROUNDED.</p> <p>TRANSFORMER (WITH INTERNAL CAPACITANCE): T1040C-2</p> <p>mA OUTPUT: 10.0 AMP. INPUT: 0.40</p> <p>UNIVERSAL VOLTAGE BALLAST — (ONE PER UNIT): BPU</p>

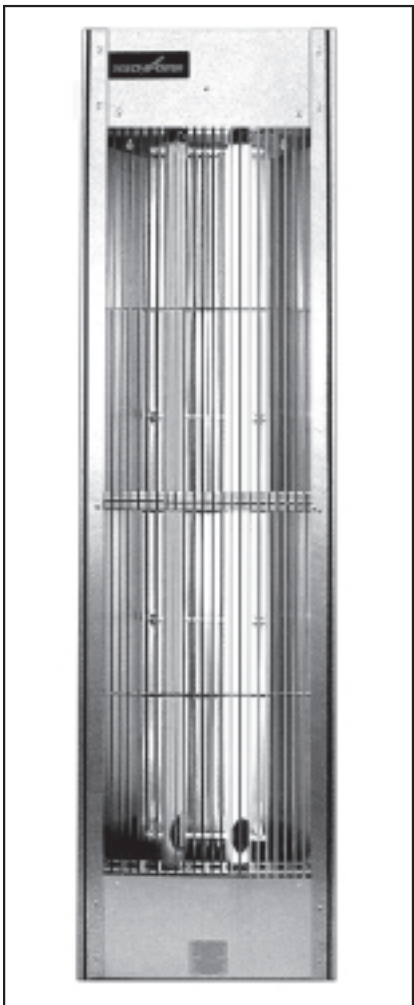

Designed for high-traffic areas, typical Vertical Wall Mounted Model installations include personnel doors, loading dock areas, along corridors, at firewall breaks, and at virtually all exterior access points.

STANDARD FEATURES: Rear keyhole slots for wall mounting. Safety guard; safety switch interrupts electrical current when servicing unit; internal metal insect collection drawer; spring-loaded and fixed lampholder sets for simple lamp installation; reflector panel increases black light emission... three-wire grounded cord and plug. 120Volt Models are safety-tested and certified by Intertek Testing Services, N.A. Inc. (ETL™).

ENERGY EFFICIENT (EE) MODELS are designed to comply with various energy compliance acts and energy conservation programs. Electronic-ballasted models reduce overall electrical consumption, while increasing light output by 8% to 15% per lamp due to increased operational efficiency. Less energy consumed... more insect attraction light emitted.

HIGH PERFORMANCE (HP) MODELS utilize Ultra High Current (UHC) circuitry to increase black light emission for flying insect attraction. An Insect-O-Cutor® innovation, our UHC circuitry overdrives the insect attraction lamps without shortening lamp life.



Contains Mercury; Dispose According to Local, State or Federal Laws

1641 Lewis Way
Stone Mountain, GA, USA 30083-1107
Phone: (770) 939-2835
Fax: (770) 621-0100
e-mail: info@insect-o-cutor.com

<http://www.insect-o-cutor.com>