

FLYING INSECT ELECTROCUTORS

## VERTICAL WALL MOUNT SERIES

UNITED STATES		CANADIAN	MODEL	BLACK LIGHT	METAL
HP MODELS	EE MODELS	MODEL NUMBER	SERIES	ATTRACTION LAMPS	MATERIALS
994DG	994EDG	N/A	9	18 AND 18B	SAND BEIGE TEXTURED
994DGA	994EDGA	994EDGA	9	18 AND 18B	ALUMINIZED STEEL
994DGS	994EDGS	994EDGS	9	18 AND 18B	STAINLESS STEEL
6192DG	6199EDG	N/A	6	24 AND 24B	SAND BEIGE TEXTURED
6192DGA	6199EDGA	812ECBD	6/8	24 AND 24B	ALUMINIZED STEEL
6192DGS	6199EDGS	812CBDS	6/8	24 AND 24B	STAINLESS STEEL
1192DG	1199EDG	N/A	11	48 AND 48B	SAND BEIGE TEXTURED
1192DGA	1199EDGA	N/A	11	48 AND 48B	ALUMINIZED STEEL
1192DGS	1199EDGS	N/A	11	48 AND 48B	STAINLESS STEEL

### TECHNICAL DATA AND ELECTRICAL SPECIFICATIONS

#### 120 VOLT/60 HZ MODELS

PRIMARY: 120 VOLTS, 60 HERTZ      SECONDARY: 4500 VOLTS  
NOTE: UNIT MUST BE GROUNDED.

TRANSFORMER (WITH INTERNAL CAPACITANCE): T740C  
mA OUTPUT: 9.8 AMP. INPUT- HP MODELS: 1.8-2.0 EE MODELS 1.4-1.5

HIGH PERFORMANCE BALLASTS — ONE OF EACH PER LAMP:

	SERIES 9	SERIES 6/8	SERIES 11
PRIMARY:	BP18	BP24	BP48
AUXILIARY:	—	BA24	BA48

ENERGY EFFICIENT BALLASTS — ONE PER UNIT:

SERIES 9	SERIES 6/8	SERIES 11
BPE18	BPE24/48-2	BPE24/48-2

#### UNIT DIMENSIONS:

SERIES 9: 13.25" / 33.70 CM WIDE X 27.00" / 68.60 CM HIGH X 5.25" / 13.40 CM DEEP  
SERIES 6/8: 16.25" / 41.30 CM WIDE X 36.00" / 91.50 CM HIGH X 7.25" / 18.50 CM DEEP  
SERIES 11: 16.25" / 41.30 CM WIDE X 60.00" / 152.40 CM HIGH X 7.25" / 18.50 CM DEEP

#### SHIPPING WEIGHTS:

	SERIES 9	SERIES 6/8	SERIES 11
BEIGE TEXTURED	25 LBS/ 11.4 KG	42 LBS/ 19.1 KG	68 LBS/ 31.0 KG
ALUMINIZED STEEL	25 LBS/ 11.4 KG	42 LBS/ 19.1 KG	68 LBS/ 31.0 KG
STAINLESS STEEL	28 LBS/ 12.7 KG	46 LBS/ 20.9 KG	73 LBS/ 33.0 KG

#### PACKED CARTON:

SERIES 9: 3.4 CUBIC FEET / 0.10 CUBIC METERS  
SERIES 6/8: 3.8 CUBIC FEET / 0.11 CUBIC METERS  
SERIES 11: 6.6 CUBIC FEET / 0.18 CUBIC METERS



#### 220 VOLT/50 HZ MODELS


PRIMARY: 220 VOLTS, 50 HERTZ      SECONDARY: 5000VOLTS  
NOTE: UNIT MUST BE GROUNDED.

TRANSFORMER (WITH INTERNAL CAPACITANCE): T1040C-2  
mA OUTPUT: 10.0 AMP. INPUT: 0.40

UNIVERSAL VOLTAGE BALLAST (ONE PER UNIT): BPU

**STANDARD FEATURES:** Rear keyhole slots for wall mounting. Safety guard; safety switch interrupts electrical current when servicing unit; internal metal insect collection drawer; spring-loaded and fixed lampholder sets for simple lamp installation; reflector panel increases black light emission... three-wire grounded cord and plug.

120Volt Models are safety-tested and certified by Intertek Testing Services, N.A. Inc. (ETL™); Canadian Models 812/812E are safety-tested and certified by Canadian Standards Association (CSA®).

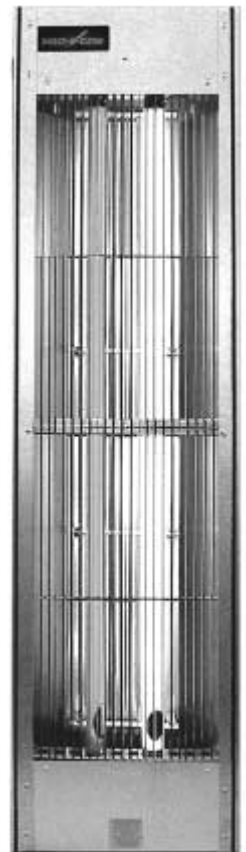

Designed for high-traffic areas, typical Vertical Wall Mounted Model installations include personnel doors, loading dock areas, along corridors, at firewall breaks, and at virtually all exterior access points.

**ENERGY EFFICIENT (EE) MODELS** are designed to comply with various energy compliance acts and energy conservation programs. Electronic-ballasted models reduce overall electrical consumption, while increasing light output by 8% to 15% per lamp due to increased operational efficiency. Less energy consumed... more insect attraction light emitted.

**HIGH PERFORMANCE (HP) MODELS** utilize Ultra High Current (UHC) circuitry to increase black light emission for flying insect attraction. An Insect-O-Cutor® innovation, our UHC circuitry overdrives the insect attraction lamps without shortening lamp life.



SERIES 9, SERIES 6/8, AND SERIES 11

<http://www.insect-o-cutor.com>

INSECT-O-CUTOR®  
1641 Lewis Way  
Stone Mountain, GA  
USA 30083-1107



Phone: (770) 939-2835  
Fax: (770) 621-0100  
e-mail: [info@insect-o-cutor.com](mailto:info@insect-o-cutor.com)  
COPYRIGHT INSECT-O-CUTOR® 2006